

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/004504 A1

(51) International Patent Classification⁷: **A43B 7/08**,
7/12, 17/08

(21) International Application Number:
PCT/IT2003/000130

(22) International Filing Date: **4 March 2003 (04.03.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
MI2002U 000344 **2 July 2002 (02.07.2002)** **IT**

(71) Applicant (*for all designated States except US*): **SIPORT
S.P.A. [IT/IT]; Via Giotto, 1, I-20090 Segrate (IT).**

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **GRANDINI, Gabriele
[IT/IT]; Via L. Settembrini, 29, I-20124 Milan (IT).**

(74) Agent: **PELLEGATTA, Ottorino; c/o Calvani, Salvi &
Veronelli S.R.L., Piazza Duca d'Aosta, 4, I-20124 Milan
(IT).**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **WATERPROOFED AND VENTILATED ITEM OF FOOTWEAR**

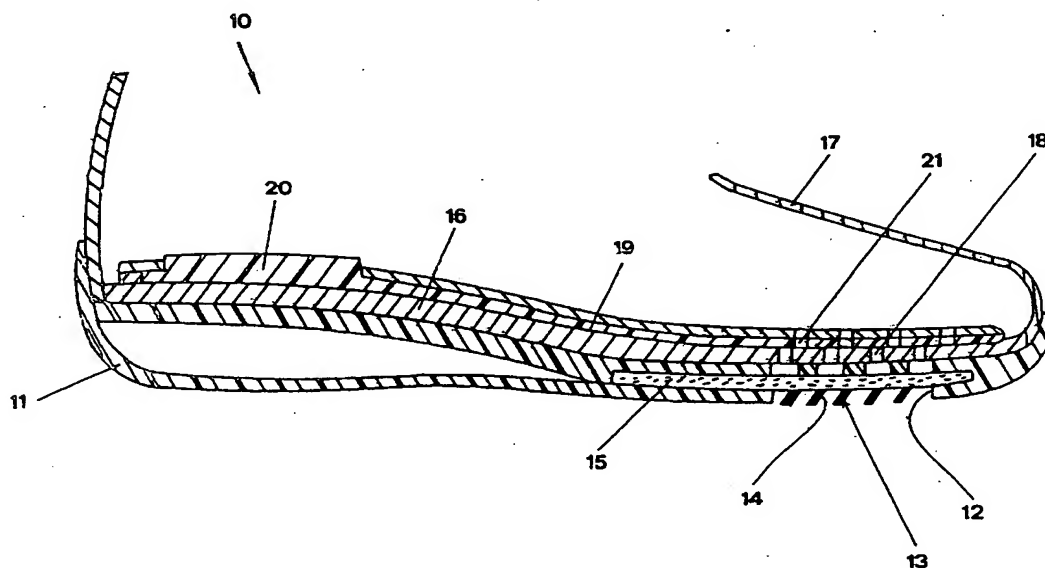

(57) Abstract: An item of footwear is described which comprises in combination: an outsole (11) having in its forepart at least a vent opening (12) which is made through the thickness of said outsole (11), a grating-like element (13) which is set into said vent opening (12) and acts as a screen by separating and protecting the inside of the footwear from the ground which comes into contact with said outsole (11), a pliable sheet insert (15) made from a breathable and waterproofed material which is embedded into the outsole (11) and is positioned inside the outsole (11) so as to overlie said vent opening (12), an insole (16) made of a breathable and waterproofed material, and an upper (17) made of a breathable and waterproofed material.

WO 2004/004504 A1

WATERPROOFED AND VENTILATED ITEM OF FOOTWEAR

DESCRIPTION

5 TECHNICAL FIELD

The present invention generally relates to the technical field of footwear, and particularly an item of footwear featuring some important improvements in relation to the ability of allowing the perspiratory moisture given off from the feet to pass through an outsole of the footwear which is specifically designed to this purpose, while ensuring at the same time an effective waterproofness.

10

BACKGROUND ART

There are known in the art items of footwear which comprise an outsole made from a soling material such as rubber, or a compound mixed with rubber, or also polyurethane or polyvinyl chloride. Such soling materials used in the production of outsoles are capable of providing protection, traction, durability, waterproofness and play also a role in flexibility, stability and cushioning.

15

However, the outsoles made from such materials suffer from an important disadvantage by not being permeable to the moisture which perspires from the plantar of the feet. Since the perspiration moisture can scarcely move away from the outsole of the footwear, it combines with the darkness and the warmth inside the footwear to create a fertile breeding ground for the fungi and bacteria that normally live on our skin. The

20

25

- 2 -

decomposition of outer layers of the skin operated by the fungi and bacteria produces isovaleric acid which is associated with the typical foul foot odor. Moreover, if the perspiration moisture is not adequately removed from the footwear, the skin of the feet macerates and even mild friction in the
5 footwear can cause painful blisters to appear on the skin of the feet.

To overcome this drawback and maintain the environment inside the footwear as dry and healthy as possible, attempts have been made in order to allow the perspiratory moisture given off from the feet to breathe not only through the upper of the footwear, but also through the outsole of the
10 footwear in order to vent the moisture and cool the inside of the footwear.

Document EP 0 121 645 B1 concerns an item of footwear aimed at solving this technical problem. In particular, the footwear described in this document comprises a rubber outsole with holes distributed therethrough which are closed by small leather inserts arranged on the side intended to
15 face the upper of the footwear. These leather inserts are glued and/or fixed into the holes with a suitable adhesive. The footwear is also provided with an insole made of cork.

According to EP 0 121 645 B1, the object of the through holes distributed in the outsole of the footwear is to provide perspiration of
20 moisture through the outsole. However, also the footwear disclosed in EP 0 121 645 B1 suffers from some disadvantages, specifically in relation to its manufacturing process and to its ability to ensure a durable breathability and waterproofness.

As regards the process for manufacturing such a footwear, this
25 process should comprise at least a first step for producing the perforated

outsole, a second step for gluing the leather inserts into the holes made through the outsole and a third step for attaching the insole and the upper to the top side of the outsole. A manufacturing process of this kind is rather inefficient, and moreover the quality of the footwear thereby produced does
5 not meet the high standards which are demanded in footwear at the present time.

In relation to the waterproofness of a footwear of this kind, it has been found that the leather inserts which are glued into the holes provided in the outsole of the footwear can become detached from the outsole upon
10 repeated bending of the outsole during the normal use of the footwear. Thus, under rainy weather conditions water from the outside ambient can penetrate the footwear through the holes and cause great discomfort. Moreover, no means is provided for imparting a level of waterproofness to the leather inserts which are inherently hydrophilic and in a short time tend
15 to absorb and transmit liquid water, specially in the case the outsole of footwear contacts a wet or muddy ground.

In connection with the breathability of the footwear of the kind known in the art, a major drawback consists in that, eventually, the holes made in the outsole become clogged with dirt and mud, thus they are no
20 more capable of venting the moisture given off in perspiring from the feet. This drawback becomes apparent specially in the case the footwear is intended for use in leisure time and/or sport activities, during which it often occurs that the outsole touches a dirty or muddy ground.

DISCLOSURE OF THE INVENTION

It is therefore an object of the present invention to provide an item of footwear intended for leisure time and/or sport activities which is improved in relation to its breathability and waterproofness.

5 Accordingly, this object is achieved with an item of footwear comprising in combination:

- an outsole having in its forepart at least a vent opening which is made through the thickness of said outsole,
- a grating-like element which is set into said vent opening and acts as
10 a screen by separating and protecting the inside of the footwear from the ground which comes into contact with said outsole,
- a pliable sheet insert made from a breathable and waterproofed material which is embedded into the outsole and is positioned inside the outsole so as to overlie said vent opening,
- 15 - an insole made of a breathable and waterproofed material, and
- an upper made of a breathable and waterproofed material.

BRIEF DESCRIPTION OF DRAWINGS

The features of the present invention will appear in the course of the
20 following description of an embodiment thereof chosen by way of example and illustrated with reference to the accompanying drawings, in which:

Figure 1 is a plan view of the bottom surface with the tread pattern of the outsole of the item of footwear according to the present invention;

Figure 2 is a longitudinal section view of the footwear according to
25 the present invention taken along line A-A of Figure 1; and

Figure 3 is a cross section view of the footwear according to the present invention taken along line B-B of Figure 1.

5 **BEST MODE OF CARRYING OUT THE INVENTION**

Referring to Figs. 1-3 of the drawings, there is shown the item of footwear according to the present invention, generally designated by 10. The footwear comprises, in a manner known per se, an outsole 11 which is produced by injection moulding and is made of a suitable soling material
10 such as rubber or a compound mixed with rubber, or also polyurethane or polyvinyl chloride.

The outsole 11 is provided in its forepart with at least one large vent opening 12 which is made through the thickness of the outsole 11. In each vent opening 12 a grating-like element 13 is set which acts as a screen by
15 separating and protecting the inside of the footwear from the ground contacted by the tread of outsole 11. The grating-like element 13 is formed of juxtaposed straight or curved, parallel or latticed bar elements 14 which are preferably integral with the outsole 11 and are produced together therewith by injection moulding. Alternatively, the bar elements 14 of the
20 grating-like element 13 are integral with an insert (not shown) which is adapted to be inserted into the vent opening 12 and fixed therein.

The length and width of the vent openings 12 provided in the outsole 11 are chosen so that any dirty or muddy ground matter which may contact the outsole 11 and enter the vent openings 12 is readily removed therefrom
25 by the natural occurring bending movement of the outsole 11 when one

- 6 -

walks or runs. Therefore, the possibility that the vent openings 12 become clogged by the ground matter is reduced to a minimum.

The outsole 11 includes a pliable sheet insert 15 which is made from a suitable breathable and waterproofed material and is embedded into the outsole 11. The sheet insert 15 has a thickness preferably ranging from 2 to 3 mm. To ensure the breathability of the footwear, the sheet insert 15 is positioned inside the outsole 11 so as to overlie the vent openings 12 as shown particularly in Figs. 2 and 3 of the drawings. The sheet insert 15 is protected from wear and damage by the screening action of the grating-like elements 13.

As mentioned above, the material of the sheet insert 15 is selected among breathable and waterproof materials which are available in the art of footwear manufacturing. Preferably, the material used for the sheet insert 15 is waterproofed leather, i.e. leather which has been treated so as to improve its repellency to water.

Waterproofing of leather is a process known in the art by which the leather is coated with a protective hydrophobic, i.e. water repellent compound which is formulated so as to have no effect on the natural breathability of the leather. This protective coating can be applied to leather at the tannery during the tanning process and the leather produced thereby is capable of resisting absorption and transmission of liquid water. Moreover, such treated leather has a greater strength and durability than other known synthetic breathable and waterproof materials which are adapt to be used in footwear manufacturing. The use of leather is also advantageous because, as

- 7 -

a natural material, leather is more effective in allowing perspiration moisture to breathe than other known synthetic materials.

The pliable sheet insert 15 is fixed firmly into position inside the outsole 11 when this is produced by injection moulding. By this means, the outsole 11 is produced together with the sheet insert 15 embedded therein in only one step and no further gluing step of the sheet insert 15 in the outsole 11 is required. Thus, the process for manufacturing the footwear is more energy and cost efficient than those required for producing other known footwear of this kind. Furthermore, an item of footwear exhibiting a higher quality can be produced because the sheet insert 15 is sealed along its border to the outsole 11, thereby ensuring a durable watertight closure along the border of the vent openings 12.

The item of footwear according to present invention comprises also an insole 16 to which the upper 17 is attached by a stitching seam, f.i. with a Strobel working method, and then the insole 16 together with the upper 17 is attached to the outsole 11 in a manner known in the art of footwear manufacturing.

The insole 16 is preferably made of a breathable and waterproofed leather, leatherboard or fibreboard, and is flexible and able to absorb the moisture given off in perspiring from the feet. Other suitable materials for the insole 16 are ethylene vinyl acetate, polyesters, thermoplastics, graphite, and foam polymers which may add cushioning and support to moisture control. In fact, as shown in Figs. 2 and 3 of the drawings, the insole 16 is provided with through holes 18 located in its forepart which aid to moisture

- 8 -

breathability of the insole. The insole 16 has a thickness generally in the range of 1.8-2.0 mm.

The insole 16 may be suitably covered by an insock 19 to conceal any stitches which may protrude. The insock 19 is preferably formed of
5 layers of different materials joined together by a stitching seam. The insock 19 comprises at least a top layer made of leather which is joined to a bottom layer made of ethylene vinyl acetate. The insock 19 is also provided with a heel cushioning pad 20 located in its back part which may be integral with the bottom layer and protrude through an opening in the top layer in order to
10 contact the heel portion of the feet. Alternatively, the heel cushioning pad 20 may be a separate pad which is attached to the top layer of the insock 19 and is filled inside with a gel-like padding material. The insock 19 is also provided with through holes 21 located in its forepart which aid to moisture breathability of the insock.

15 The upper 17 of the item of footwear 10 is made from a waterproof and breathable material such as waterproofed leather or a combination of materials such as waterproofed leather, foam polymers and nylon or polyester mesh bonded together in a laminated form and capable of ensuring in combination breathability and waterproofness to the upper.

20 From the foregoing it can be readily understood that the item of footwear according to the present invention obviates the drawbacks of other similar footwear known in the art. In fact, the item of footwear of the invention can be produced with a more efficient manufacturing process which requires a less number of steps. Furthermore, the item of footwear of
25 the invention permits an optimum ventilation inside the footwear to be

- 9 -

achieved which maintains the environment around the feet cool, dry and healthy by the use of high performance breathable and waterproofed leather and synthetic materials in combination with a novel outsole construction.

CLAIMS

1. An item of footwear (10) comprising in combination:

- an outsole (11) having in its forepart at least a vent opening (12) which is made through the thickness of said outsole (11),
- 5 - a grating-like element (13) which is set into said vent opening (12) and acts as a screen by separating and protecting the inside of the footwear from the ground which comes into contact with said outsole (11),
- 10 - a pliable sheet insert (15) made from a breathable and waterproofed material which is embedded into the outsole (11) and is positioned inside the outsole (11) so as to overlie said vent opening (12),
- an insole (16) made of a breathable and waterproofed material, and
- an upper (17) made of a breathable and waterproofed material.

15 2. An item of footwear according to claim 1, wherein said grating-like element (13) is formed of juxtaposed straight or curved, parallel or latticed bar elements (14) which are integral with the outsole (11) and are produced together therewith.

20 3. An item of footwear according to claim 1, wherein said grating-like element (13) is formed of juxtaposed straight or curved, parallel or latticed bar elements (14) which are integral with an insert intended to be inserted into said vent opening (12) in the outsole (11) and fixed therein.

- 11 -

4. An item of footwear according to claim 1, wherein the material of the sheet insert (15) is waterproofed leather.

5. An item of footwear according to claim 1, wherein the material of the
5 insole (16) is waterproofed leather, leatherboard or fibreboard.

6. An item of footwear according to claim 1, wherein said insole (16) is provided with through holes (18) located in the forepart thereof which aid to moisture breathability of the insole.

10

7. An item of footwear according to claim 1, wherein said insole (16) is covered by an insock (19).

8. An item of footwear according to claim 7, wherein said insock (19) is
15 formed of layers of different materials joined together by a stitching seam.

9. An item of footwear according to claim 8, wherein said insock (19) comprises at least a top layer made of leather and a bottom layer made of ethylene vinyl acetate.

20

10. An item of footwear according to claim 8, wherein the insock (19) is provided with a heel cushioning pad (20) located in its back part.

- 12 -

11. An item of footwear according to claim 8, wherein said insock (19) is provided with through holes (21) located in its forepart which aid to moisture breathability of the insock.
- 5 12. An item of footwear according to claim 1, wherein the upper (17) is made from waterproofed leather or a combination thereof with synthetic materials such as foam polymers and nylon or polyester mesh bonded together in a laminated form.

AMENDED CLAIMS

**[Received by the International Bureau on 27 OCT 2003 (27.10.03) ;
original claim 1, amended ; original claims 2, 3 and 6 to 11, unchanged ;
original claims 4, 5 and 12, cancelled]**

1. An item of footwear (10) comprising in combination:

- an outsole (11) having in its forepart at least a vent opening (12)
5 which is made through the thickness of said outsole (11),
- a grating-like element (13) which is set into said vent opening (12)
 and acts as a screen by separating and protecting the inside of the
 footwear from the ground which comes into contact with said
 outsole (11),
- 10 - a pliable sheet insert (15) made from a breathable and water-
 repellent leather material which is embedded into the outsole (11)
 and is positioned inside the outsole (11) so as to overlie said vent
 opening (12),
- an insole (16) made of a breathable and water-repellent leather,
15 leatherboard or fibreboard material, and
- an upper (17) made of a breathable and water-repellent leather
 material or a combination thereof with synthetic materials such as
 foam polymers and nylon or polyester mesh bonded together in a
 laminated form.

20 2. An item of footwear according to claim 1, wherein said grating-like
 element (13) is formed of juxtaposed straight or curved, parallel or latticed
 bar elements (14) which are integral with the outsole (11) and are produced
 together therewith.

25

3. An item of footwear according to claim 1, wherein said grating-like element (13) is formed of juxtaposed straight or curved, parallel or latticed bar elements (14) which are integral with an insert intended to be inserted into said vent opening (12) in the outsole (11) and fixed therein.
4. An item of footwear according to claim 1, wherein said insole (16) is provided with through holes (18) located in the forepart thereof which aid to moisture breathability of the insole.
5. An item of footwear according to claim 1, wherein said insole (16) is covered by an insock (19).
6. An item of footwear according to claim 5, wherein said insock (19) is formed of layers of different materials joined together by a stitching seam.
7. An item of footwear according to claim 6, wherein said insock (19) comprises at least a top layer made of leather and a bottom layer made of ethylene vinyl acetate.
8. An item of footwear according to claim 6, wherein the insock (19) is provided with a heel cushioning pad (20) located in its back part.

9. An item of footwear according to claim 6, wherein said insock (19) is
5 provided with through holes (21) located in its forepart which aid to
moisture breathability of the insock.

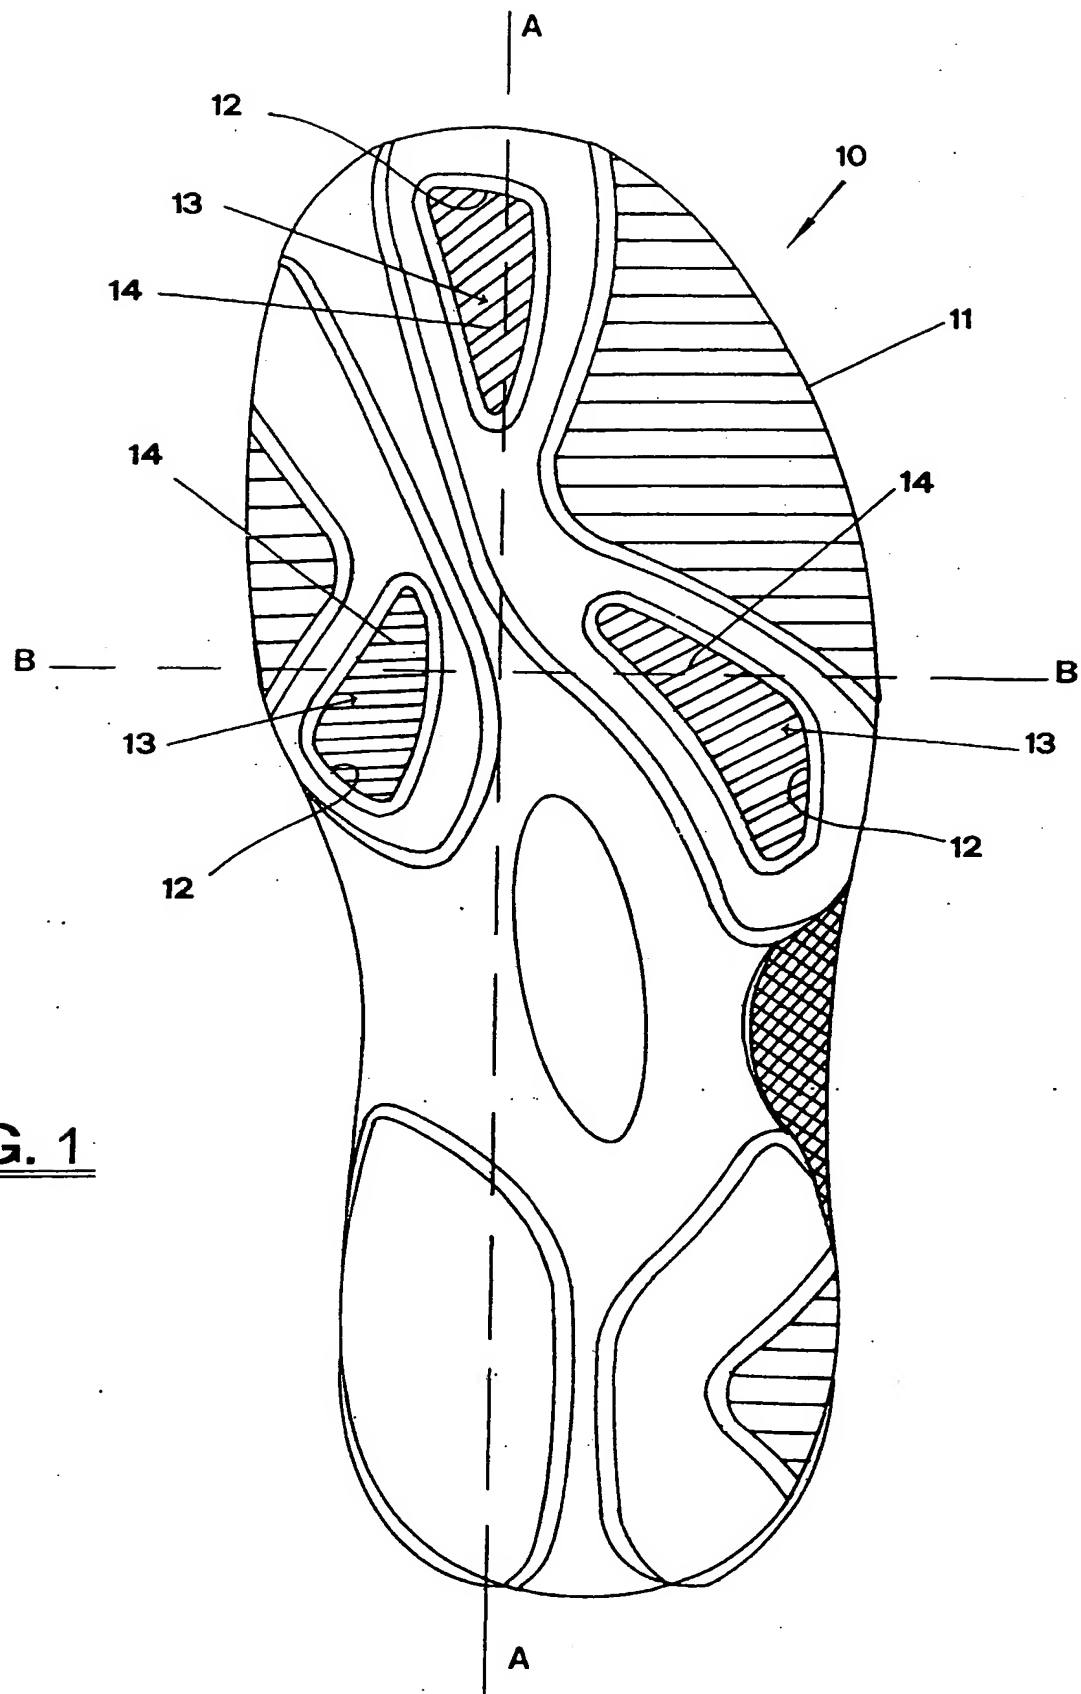


FIG. 1

FIG. 2


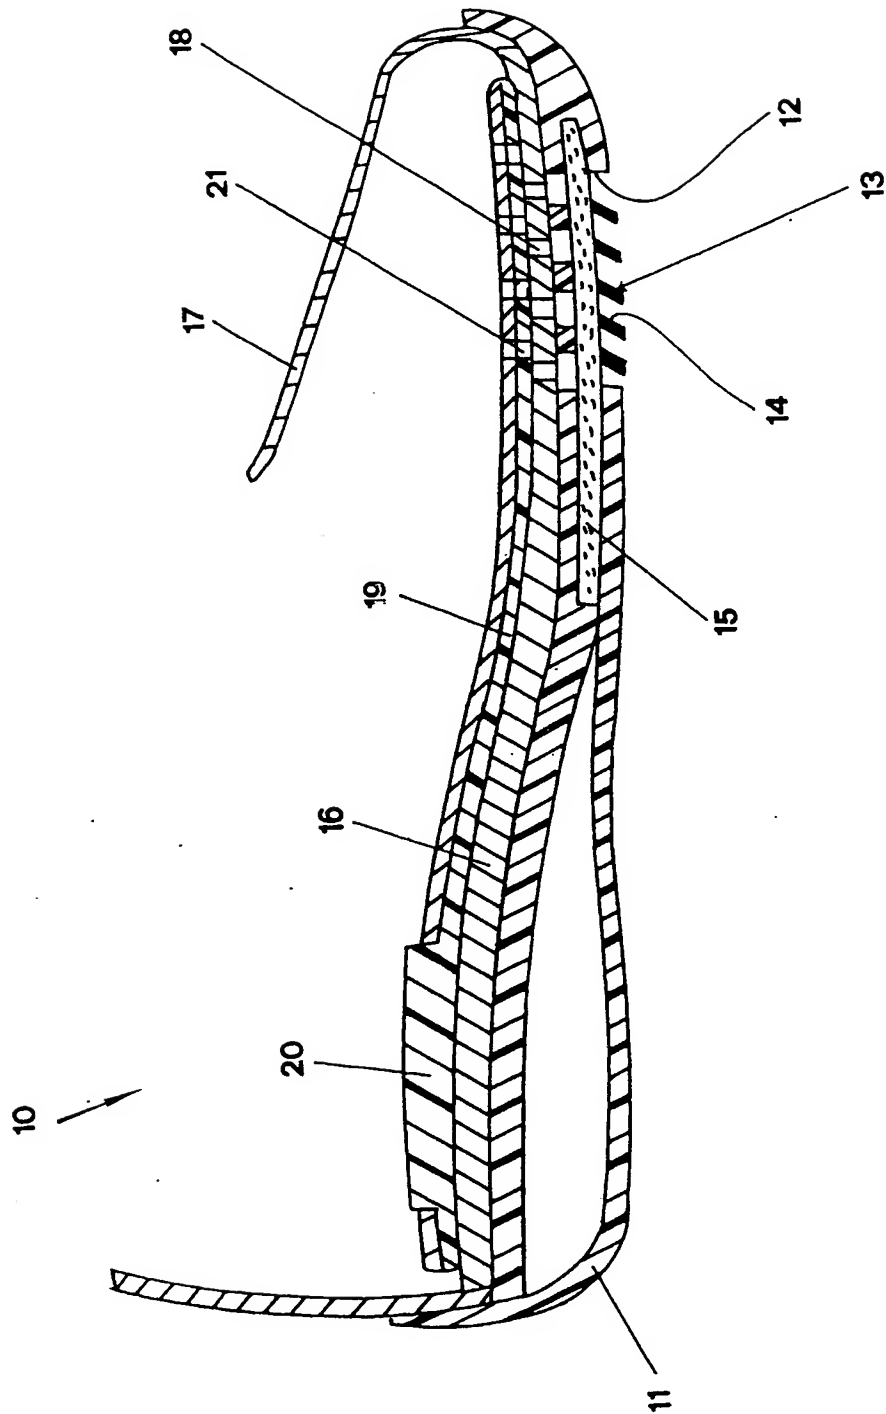


FIG. 3

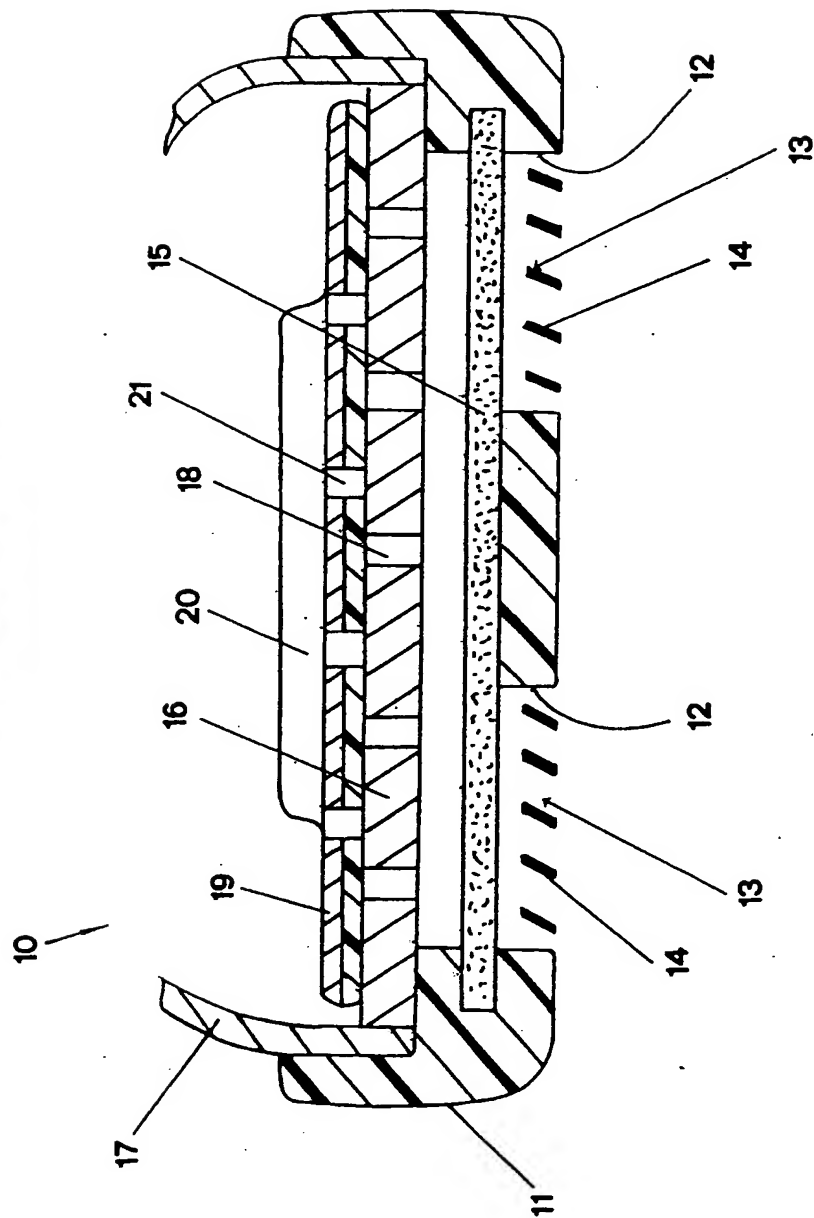

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 03/00130

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A43B7/08 A43B7/12 A43B17/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A43B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 28711 A (GORE W L & ASS GMBH ; RAUCH MAX (DE)) 14 August 1997 (1997-08-14) page 6, line 1 -page 7, line 38; figures 1,3,6	1,2
X	US 2002/017036 A1 (BERGER CHRISTOPH ET AL) 14 February 2002 (2002-02-14) paragraphs '0041!', '0042!', '0048!', '0049!'; figures 1A,1B,2,3	1,3,6
A	DE 299 11 499 U (SPANNRIT SCHUHKOMPONENTEN GMBH) 13 January 2000 (2000-01-13) claims 1,3,9; figures	7-10
A	EP 0 910 964 A (NOTTINGTON HOLDING BV) 28 April 1999 (1999-04-28) paragraphs '0018!-'0021!'; figures 1,2	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

23 June 2003

Date of mailing of the international search report

01/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Vesin, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00130

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 121 645 A (DIAMANTI & C CREAZIONI FALC) 17 October 1984 (1984-10-17) cited in the application the whole document . ----	1
A	US 5 983 524 A (POLEGATO MARIO) 16 November 1999 (1999-11-16) the whole document	1
A	DE 175 743 C (RICHARD SCHUBERT) 29 May 1905 (1905-05-29) the whole document -----	1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00130

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9728711	A	14-08-1997	DE 29601932 U1	25-07-1996
			AT 226404 T	15-11-2002
			AU 2150997 A	28-08-1997
			WO 9728711 A1	14-08-1997
			DE 19780069 D2	08-04-1999
			DE 59708577 D1	28-11-2002
			DK 959704 T3	24-02-2003
			EP 0959704 A1	01-12-1999
			ES 2185001 T3	16-04-2003
			US 6508015 B1	21-01-2003
US 2002017036	A1	14-02-2002	DE 10036100 C1	14-02-2002
			EP 1197157 A1	17-04-2002
			JP 2002078506 A	19-03-2002
DE 29911499	U	13-01-2000	DE 29817172 U1	18-03-1999
			DE 29911499 U1	13-01-2000
EP 0910964	A	28-04-1999	IT 1296238 B1	18-06-1999
			EP 0910964 A2	28-04-1999
			US 5992052 A	30-11-1999
EP 0121645	A	17-10-1984	IT 1193593 B	08-07-1988
			AT 32652 T	15-03-1988
			DE 3469481 D1	07-04-1988
			EP 0121645 A2	17-10-1984
US 5983524	A	16-11-1999	IT PD950190 A1	14-04-1997
			IT PD960126 A1	17-11-1997
			AP 1033 A	27-12-2001
			AT 189103 T	15-02-2000
			AU 721719 B2	13-07-2000
			AU 7288696 A	07-05-1997
			BG 63767 B1	29-12-2002
			BG 102384 A	30-10-1998
			BR 9606686 A	23-12-1997
			DE 69606421 D1	02-03-2000
			DE 69606421 T2	21-09-2000
			DK 858270 T3	15-05-2000
			EA 273 B1	25-02-1999
			EP 0858270 A1	19-08-1998
			GR 3033025 T3	31-08-2000
			IL 123890 A	28-01-2001
			JP 11513582 T	24-11-1999
			NO 981565 A	06-04-1998
			NZ 320188 A	30-08-1999
			PL 326202 A1	31-08-1998
			RO 117228 B1	28-12-2001
			SI 858270 T1	30-04-2000
			SK 45198 A3	04-11-1998
			CA 2234720 A1	24-04-1997
			CN 1234725 A	10-11-1999
			CZ 9800969 A3	15-07-1998
			WO 9714326 A1	24-04-1997
			ES 2142620 T3	16-04-2000
			HU 9900182 A2	28-05-1999
			PT 858270 T	31-07-2000
			TR 9800633 T1	22-06-1998

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 03/00130

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5983524	A	ZA 9608643 A	10-06-1997
DE 175743	C	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)